


Sol-Go Flexible Solar Modules: 160W Class, Tall format

Sol-Go takes pride in our module design, manufacturing quality control, reasonable price and sales service along with our offering of many module shapes and sizes.


Highest Power

Sol-Go modules use only high power back contact solar cells from SunPower as well as top-quality module materials, delivering the highest power density in the market, up to 35% more power density.

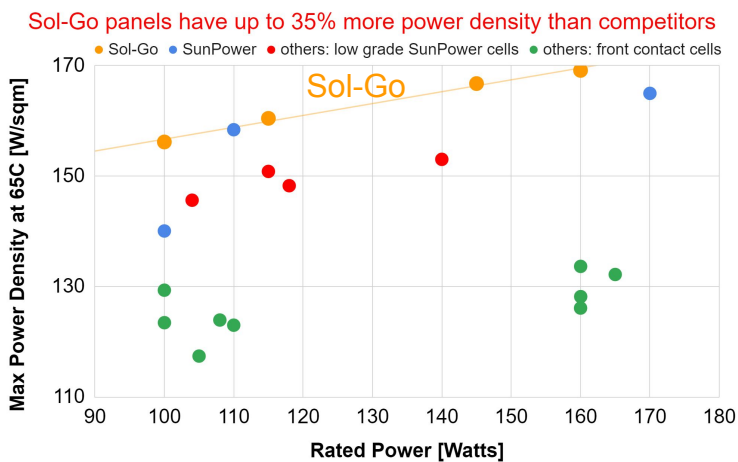

Solar Cell and Module Toughness

The solar cells used by Sol-Go have a thick, copper foundation, allowing for the flex modules to resist power loss via cracking and corrosion. Modules with front contact cells are more likely to lose power when they are bent or impacted and when in corrosive environments. Sol-Go's module materials are chosen with extensive testing to ensure a long module lifetime.

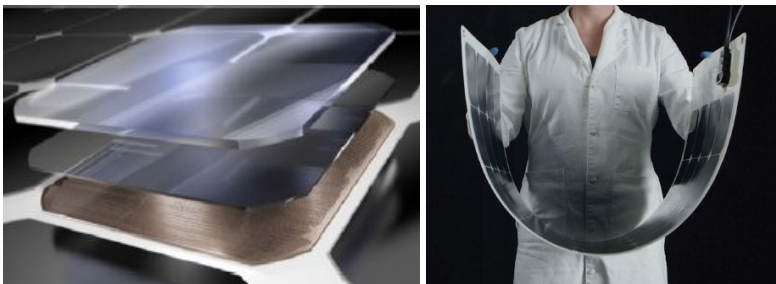


Easy Installation

The Sol-Go flex module can be rapidly installed with adhesives and/or use of the stainless steel grommets. Please review the Sol-Go install guide at www.sol-go.com for guidance on safety, installation, and care of the panels.




© July, 2020 Sol-Go Corporation. All rights reserved. Maxeon is a trademark or registered trademark of the SunPower Corporation. Specifications included on this sheet are subject to change without notice.

Sol-Go 160W Class Tall Format Panels

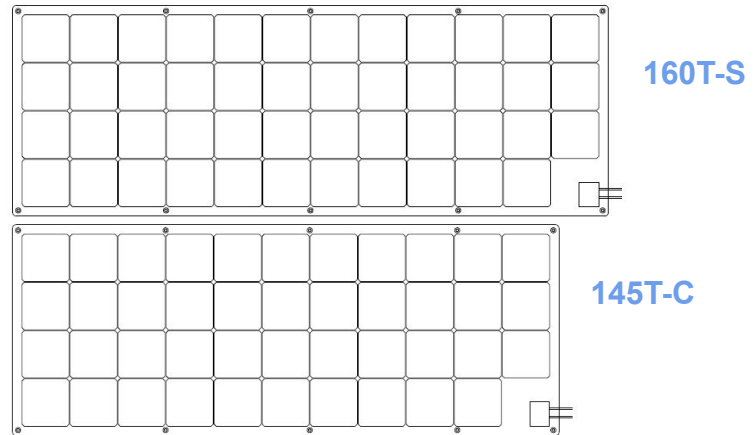Sol-Go offers two modules in this class. The 160T-S offers maximum power output and power density, while the 145T-C module offers a more compact size for applications with small areas



Typical Electrical and Mechanical Data
at STC: 25°C, 1000 W/m² and AM 1.5

| MODEL | SG-Flex-160T-S | SG-Flex-145T-C |
|--|---|--------------------------|
| Rated Power, +5%/-5% | 160W | 145W |
| Nominal Charging Voltage | 12V or 24V | |
| Max Power Voltage (Vmpp) | 27.5V | 25.2V |
| Open-circuit Voltage (Voc) | 33.4V | 30.6V |
| Max Power Current (Impp) | 5.73A | |
| Short-circuit Current (Isc) | 5.97A | |
| Power Temp Coefficient | -0.30/°C | |
| Voltage Temp Coefficient | -82 mV/°C | -75.0 mV/°C |
| Current Temp Coefficient | 3.5 mA/°C | |
| Series Fuse Rating | 15A | |
| Panel Dimensions mm LxWxH with jbox (in) | 1572x556x18 62x22x0.7 | 1445x556x18 57x22x0.7 |
| Max Rated Power Density | 192.2W/m ² | 189.5W/m ² |
| Weight | 6.8lbs / 3.1kg | 6.1lbs / 2.8kg |
| SunPower Solar Cells | Gen 3 Prime, 23% efficiency, Premium Cosmetics | |
| Junction Box | UKT PV-JB03D, IP68, 1 bypass diode | |
| Cables Connectors | 4mm ² , 12AWG, 0.55m (14 in) long PV-C001, MC4 compatible, IP68 | |
| Grommets | 316 Stainless Steel | |
| Charge Controller | None provided | |
| System Voltage | Please see install manual | |
| Certifications |    | |
| Warranty | 80% power at 5yrs, 2yr product | |